



S




M



L

配光图 | LIGHT DISTRIBUTION DIAGRAM

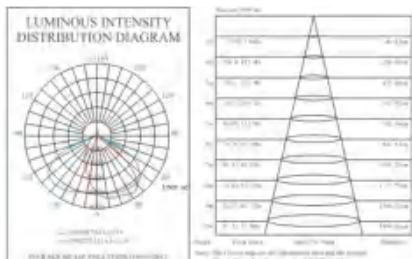

详细参数 | DETAILED PARAMETERS

| 产品型号               | 额定功率     | 输入电压   | 光通量     | 显指  | 角度区间     | 光源品牌 | 色温          |
|--------------------|----------|--------|---------|-----|----------|------|-------------|
| SYLD-03-S-30W~60W  | 30W~60W  | AC220V | 120lm/W | ≥70 | 40°-150° | CREE | 2700K-6500K |
| SYLD-03-M-60W~90W  | 60W~90W  | AC220V | 120lm/W | ≥70 | 40°-150° | CREE | 2700K-6500K |
| SYLD-03-L-90W~120W | 90W~120W | AC220V | 120lm/W | ≥70 | 40°-150° | CREE | 2700K-6500K |

