


DESCRIPTION

Tilt head with IP20 surface and fixed head with IP65 surface
Available in both rotatable and fixed styles
Instead of the traditional lighting GU10 and spot light
Humanized design with input and output connection, safety and efficiency

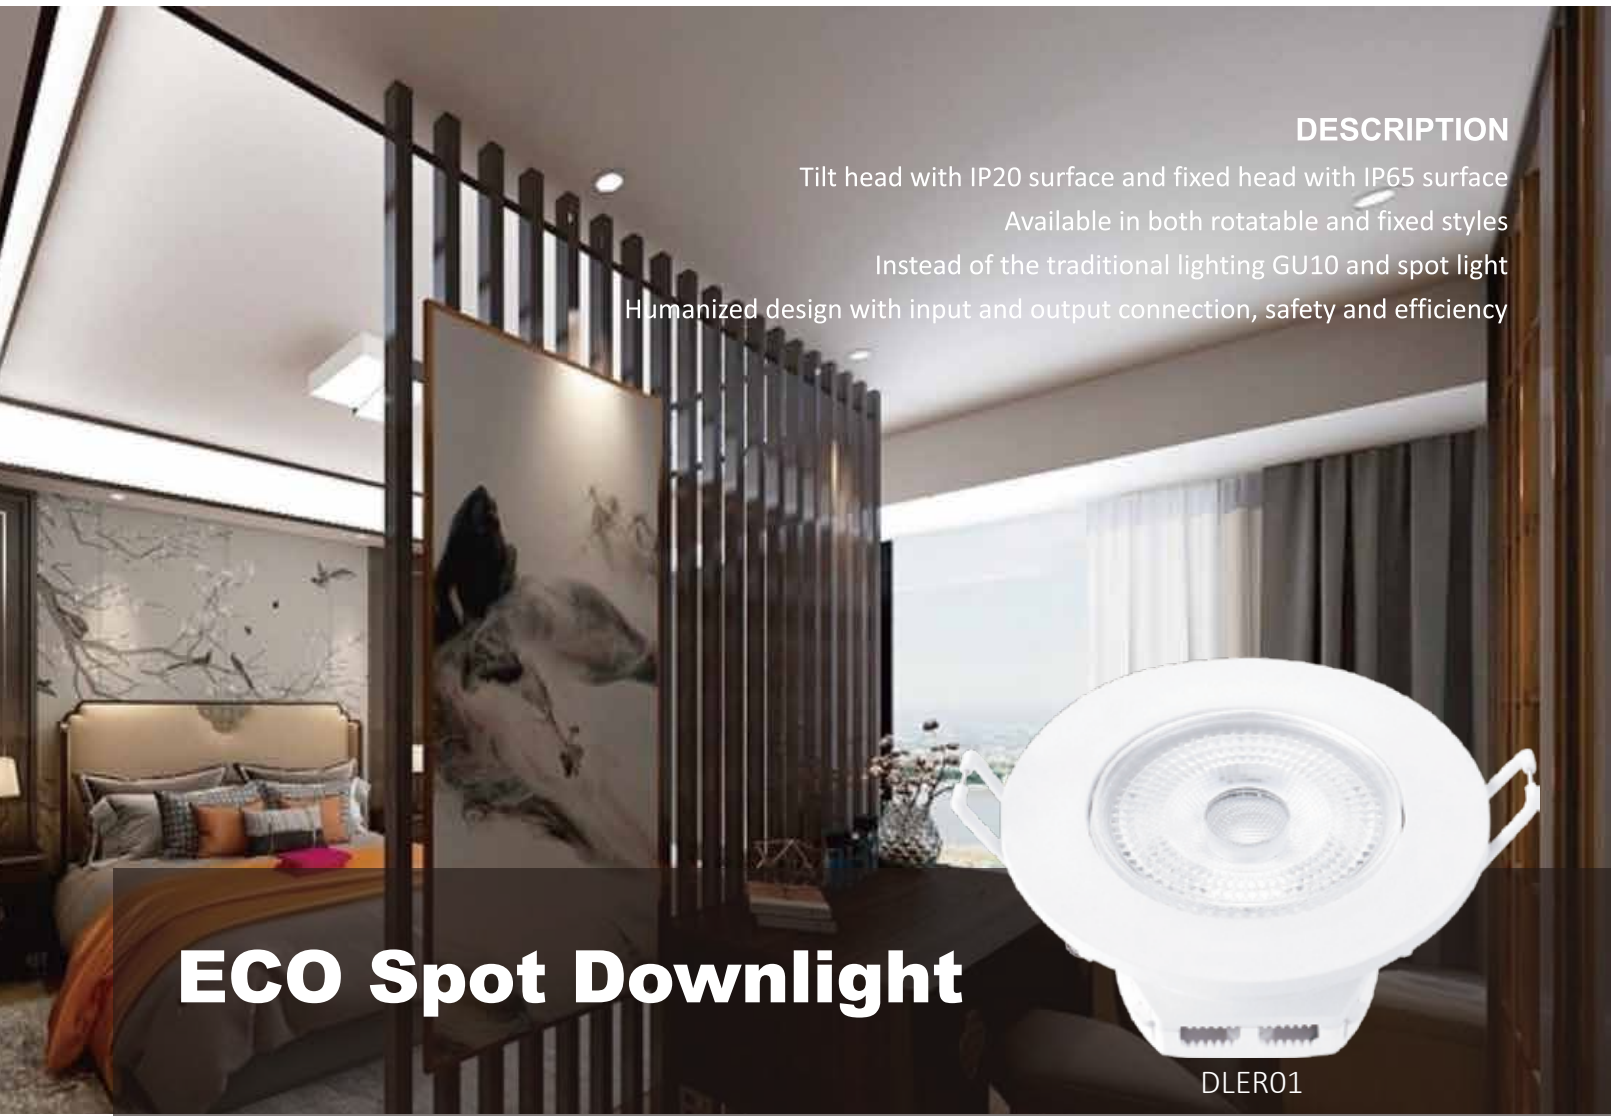

ECO Spot Downlight

DLER01



AC110-130V/220-240V



PF > 0.5



Ra ≥ 80



SMD2835



Material

Alu+PC



25000Hrs

Model	Power	Lumen	D x H(mm)	Tilt Head	Beam Angle	CRI	Cutout	Life Span
DLER01-034.5-8XXE-R	4.5W	400lm	Ø85x40mm	Yes	40°	≥80	φ72	25000H
DLER01-034.5-8XXE-RF	4.5W	400lm	Ø85x40mm	No	40°	≥80	φ72	25000H
DLER01-035-8XXE-R	5W	500lm	Ø85x40mm	Yes	40°	≥80	φ72	25000H
DLER01-035-8XXE-RF	5W	500lm	Ø85x40mm	No	40°	≥80	φ72	25000H

